

Publish Date : 16.12.2019 | Rev no: 01

# PowerMAX+ 2mtr Cat.6A S/FTP Patch Cord - PVC


DINTEK PowerMAX+™ Shielded Foil Wrapped UTP Patch Cords, are key components of the PowerMAX+™ S/FTP end-to-end solution.

DINTEK PowerMAX+™ S/FTP Patch Cords are specifically designed to support high speed data networks for 10-Gigabit Ethernet applications, and are fully tested to meet ANSI/TIA-568.2-D Category 6A channel requirements. The patch cables are made from high quality shielded four pair 26AWG stranded wire.

DINTEK PowerMAX+™ patch cords are pre-terminated with RJ45 shielded plugs and feature anti-snap strain relief boots. DINTEK recommends the entire range of PowerMAX+™ Shielded products be used in a end-to-end system to maximize cabling performance.

### Applications

- 10GBASE-T Ethernet
- 100BASE-TX Fast Ethernet
- 1000BASE-TX Gigabit Ethernet
- 1000BASE-T Gigabit Ethernet
- 10BASE-TX Ethernet
- ATM CB1G
- 155/622 Mbps ATM
- 100 Mbps TP-PMD
- 100VG-AnyLAN
- 4/16 Mbps Token Ring
- Voice

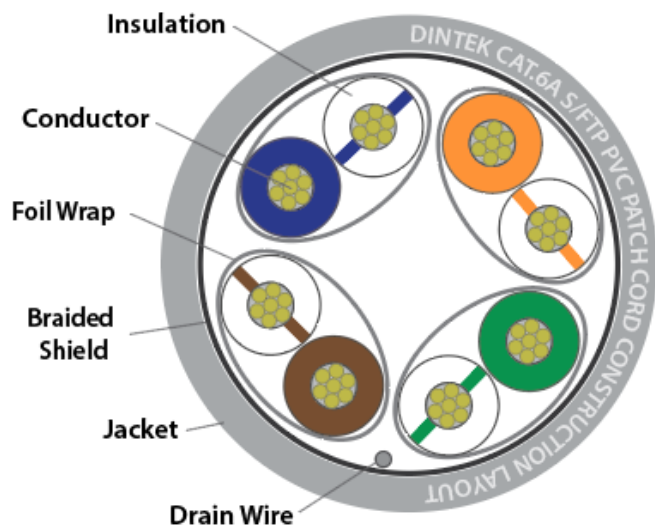

### Features

- Component Level Performance
- Molded boots prevent pin from bending and cables from kinking
- Stranded wire provides maximum flexibility
- Fully tested to meet ANSI/TIA-568.2-D category 6A requirement
- The mechanical characteristics and transmission performance meet
- 10GbaseT Ethernet, 16Mbps token Ring, 10Base-T, 100Base
- T, 155Mbps, 622Mbps ATM, Gigabit-Ethernet and 1.2Gbps ATM

### Standards Conformance

- UL Listed
- Meet Cat.6A channel performance for in ANSI/TIA-568.2-D
- CENELEC EN 50173-1, CENELEC EN 50288-10-1
- ISO/IEC 2nd Edition 11801 Class EA
- RoHS-6 Compliant

### Ordering Information

Product Number	Product Name	Jacket Type	Color	Length Qty
1201-06036	Cat.6A 4 Pair S/FTP Patch Cord Component Level	PVC	Gray	2 m
1201-06033	Cat.6A 4 Pair S/FTP Patch Cord Component Level	PVC	Gray	1 m
1201-06034	Cat.6A 4 Pair S/FTP Patch Cord Component Level	PVC	Gray	3 m
1201-06035	Cat.6A 4 Pair S/FTP Patch Cord Component Level	PVC	Gray	5 m

## Technical Specifications

### Cable Construction

#### Conductor

Material	Stranded anneal copper wire
Wire Size	26AWG

#### Insulation

Material	Foam-PE
Diameter	1.05±0.05mm
Colors	Blue/White-Blue   Orange/White-Orange   Green/White-Green   Brown/White-Brown
Drain Wire	26AWG Tinned Copper

#### Jacket

Material	PVC
Diameter	6.0±0.2mm
Color	Gray
Foil Material	Aluminum Mylar(Aluminum inward) per pair
Foil Coverage	100% coverage with 25% overlapping
Shielding Material	Tinned Copper braid
Shielding Coverage	16/6/0.10(±0.008)mm, Min. 60% coverage

### RJ45 Plug

Plug Type	Shielded RJ45 plug
Contact Material	Copper alloy 50u" gold plated over nickel
Strength	20lbs. min
Durability	750 cycles min.
Wiring schemes	T568B (or T568A on request)

### Electrical

Impedance	15Ω/100m at 20°C
Capacitance unbalance pair to ground	330pf/100m Max
D.C.R (Max.)	14.8 ohm/100m at 20°C
DC Insulation Resistance	1500MΩ/100m min.
Resistance unbalance	3% MAX./100m

## DINTEK Electronic Limited

中文: 台北市中山區中山北路二段96號 嘉新第二大樓五樓N511 英文  
 N511, 5F, 2nd Bldg, No. 96, Sec. 2, Zhongshan N. Rd., Zhongshan Dist., Taipei City 10449, Taiwan (R.O.C.)  
 P: Office: +886-2-22997898 E-mail: sales@dintek.com.tw W: www.dintek.com.tw

1201-06036